


MODELS 4SF & 4AI

A X A

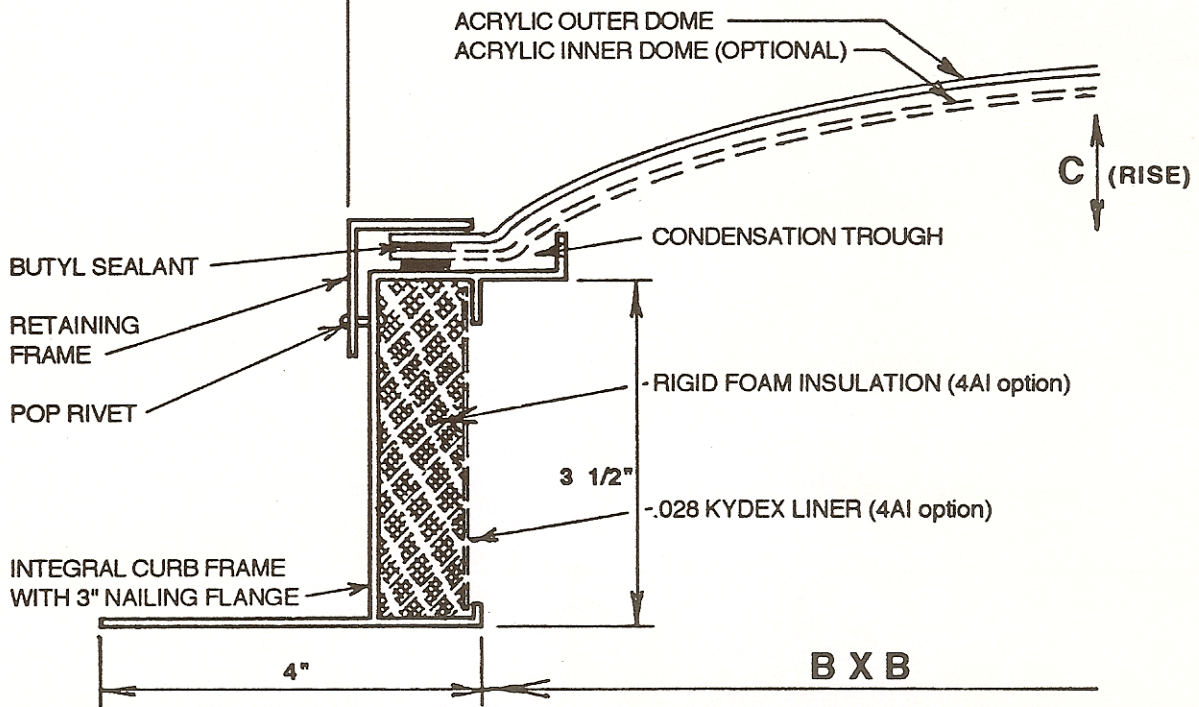

SKYLITES SHALL BE PECOT FREELITE SKYLITES. DOMES SHALL BE FORMED FROM ONE PIECE, CAST ACRYLIC SHEET OF A THICKNESS TO MEET A 40 psf DESIGN LOAD. INTEGRAL CURB FRAMES SHALL BE EXTRUDED ALUMINUM ALLOY 6063T5 .078" (RETAINING FRAME .060") WITH HELI-ARC WELDED CORNERS. A BUTYL GASKET SHALL JOIN THE DOME AND CURB FRAME, ALLOWING FOR THERMAL MOVEMENT, AND WITH A WEEP HOLE ARRANGEMENT. SKYLITES SHALL BE COMPLETELY FACTORY ASSEMBLED WITH A 3" NAILING FLANGE READY TO MOUNT TO ROOF DECK.

QUAN	MODEL	A X A	B X B	C
	- 2424	21 x 21	19 x 19	5
	- 2828	24 x 24	22 x 22	5
	- 3636	32 x 32	30 x 30	8
	- 4242	39 x 39	37 x 37	8
	- 4848	45 x 45	43 x 43	8
	- 5252	48 x 48	46 x 46	8
	- 6060	57 x 57	55 x 55	12
	- 8080	77 x 77	75 x 75	16
	- 9696	93 x 93	91 x 91	18
	- 2448	21 x 45	19 x 43	5
	- 2852	24 x 48	22 x 46	6
	- 3652	32 x 48	30 x 46	8
	- 3674	32 x 69	30 x 69	8
	- 3296	27 x 93	25 x 91	8
	- 4280	39 x 77	37 x 75	8
	- 4896	45 x 93	43 x 91	9
	- 5296	48 x 93	46 x 91	9
	- 6496	59 x 93	57 x 91	12

DOMES COLORS:

OUTER:

Transluscent Clear _____

INNER:

Transluscent Clear _____

ALUMINUM FINISH:

Mill

TYPE

MODEL

Single Glazed - Uninsulated Curb "4SF"

Double Glazed - Uninsulated Curb "4SFT"

Single Glazed - Insulated Curb "4AI"

Double Glazed - Insulated Curb "4AIT"

PECOT, INC.

P. O. BOX 470532

TULSA, OKLAHOMA 74147

PROJECT:

ARCHITECT:

CONTRACTOR:

DATE:

MODEL: _____